

8k Fiber Transmission System

- Support for 4 independent 12G/6G/3G/1.5G/270M channels
- Transport 8k (uncompressed) singals up to 10km* (6.2miles)
- Each channel supports resolutions up to 2160p/60Hz
- Each channel individually relocked
- Embedded audio / metadata support for each channel
- Integrated expansion port to add more channels
- LED indicators for channel activity and power
- Kit includes transmitter, receiver and power supplies
- Optional 19" Rack tray to mount up to 4 modules



The OTR 1A41 is a self contained fiber transmission kit for the transport of four discreet SDI signals (or 8k / 48G uncompressed) over a single fiber link. The kit includes the fiber transmitter, fiber receiver and power supplies. This is an ideal solution for the transmission of multiple uncompressed SDI streams, or 12G/4k signals.

Each SDI channel is fully independent. For 8k use, the signal is split over four separate 12G SDI links (48G) and supports full 8k resolution at 60fps. The system can also be used for any combination of SDI signals, with a mix of formats and bit-rates if required. Each channel will automatically detect and relock SDI bit rates of 270Mbit/s, 1.5Gbit/s, 3Gbit/s, 6Gbit/s and 12Gbit/s.


LED Indicators are provided for channel presence and power. An optional 19" rack mount tray is available which can accommodate up to four modules (RFR 1018).

Note: Internal CWDM optical multiplexing is utilized within the modules. This kit should be considered a self contained point to point solution and should not be integrated into external CWDM systems.

Application Example

4 x 12G SDI (8k/48G) Fiber Transport


This basic configuration is used for transporting up to four discreet SDI signals (SD/HD/3G/6G/12G) or it can be used for transporting a 8k (48G) signal over fiber.

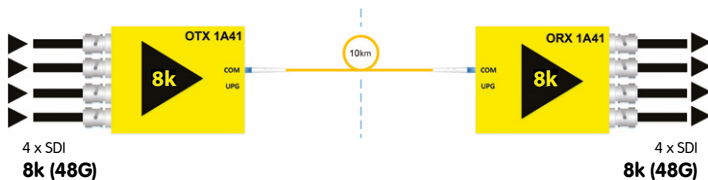

Rack Mount Options

RFR 1018

19" Rack frame to mount up to 4 modules. No tools required, modules are clipped securely in place.

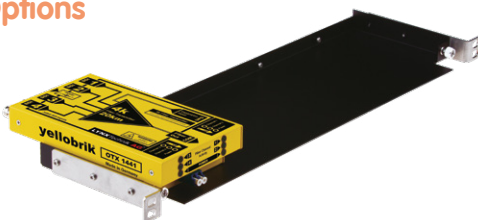

Technical Specifications

SDI Video	4 x SDI inputs on 75 Ohm BNC connections (OTX 1A41)			
	4 x SDI outputs on 75 Ohm BNC connections (ORX 1A41)			
	SMPT 259M-2008 , SMPT 292-1:2012, SMPT 292-2:2011			
	SMPT 424M-2006 , SMPT ST-2081, SMPT ST-2082			
Multi-standard / Multi-format operation auto-detect.				
Multi-rate relocking: 270Mbit/s - 1.5Gbit/s - 3Gbit/s - 12Gbit/s				
Electrical Return Loss:	to 1.5GHz	to 3GHz	to 6GHz	to 12GHz
	>15dB	>10dB	>7dB	>4dB
Automatic cable EQ	270Mbit/s	1.5Gbit/s,	3Gbit/s	12Gbit/s
	250m	190m	140m	80m
		Belden 1694A	Belden 4794R	
Fiber Optics	1 x Fiber optic I/O port (COM port)			
	1 x Fiber optic expansion port (UPG port)			
	Duplex (singlemode) LC/PC connections			
	SMPT 297M - 2006			
Internal CWDM Multiplexing				
Wavelengths	1270nm, 1290nm, 1310nm, 1330nm			
Optical budget	10.6dB			
Max. Distance*	10km (6.2 miles)			
Fiber activity LEDs for each channel				
Power	+12V DC - (Supports input range 7 - 24 V DC)			
	OTX 1A41: 5.4W ORX 1A41: 4.4W			
	2x Power LEDs on side per module			
Physical (per module)	Size (incl. connectors)	170 x 99.7 x 40.5mm (6.7" x 3.9" x 1.6)		
	Weight:	600g (21.1oz)		
Ambient	5 - 40°C (41 - 104°F) 90% Humidity (non condensing)			
Model #	OTR 1A41	EAN# 4250479326637		
Includes	2 Modules, 2 Power Supplies			


*Distance is an approximation. Actual distances achieved can be longer or shorter depending on the type of cable. Determine link losses and perform optical budget calculations to ensure correct operation.



Applications


4 x 12G SDI (8k/48G) Fiber Transport

This basic configuration is used for transporting up to four discreet SDI signals (SD/HD/3G/6G/12G) or it can be used for transporting a 8k (48G) signal over fiber.

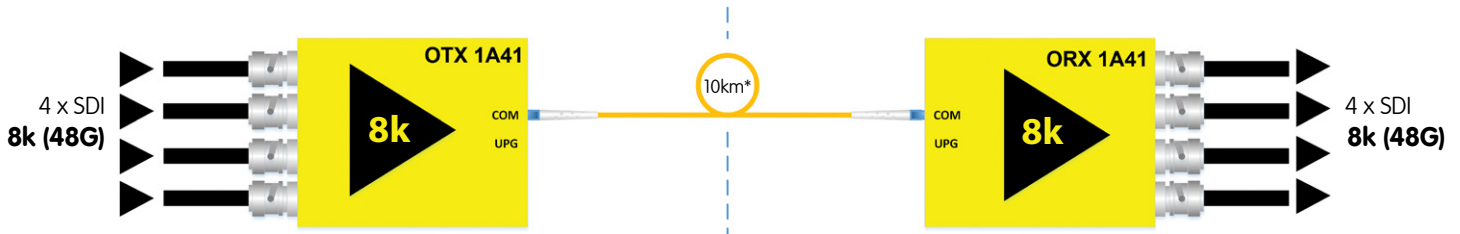

8 x 12G SDI (16k/96G) Fiber Transport

This configuration uses the UPG port to add more channels into the link from the OTR 1A42. This can be used to transport eight discreet SDI signals (SD/HD/3G/6G/12G) or it can be used for transporting a single 8k (48G) signal over a single fiber.

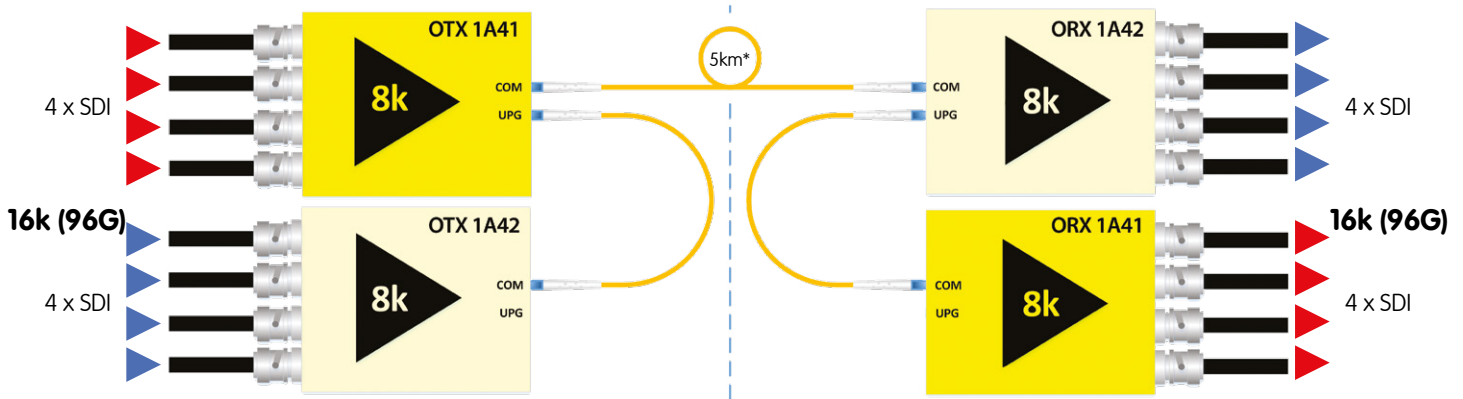

4 x 12G SDI (8k/48G) Bidirectional Fiber Transport

This configuration uses the UPG port to add more channels into the link from the OTR 1A42. This shows a bidirectional application sending and receiving four SDI channels, or sending and receiving 8k (48G) over a single fiber.

